



Wire Length Formulation Using Wire Density, Volume and Weight for Hand Calculation and Verification of Wire Usage

Mariane A. Mendoza ^{a*}

^a STMicroelectronics, Inc., Calamba City, Laguna, 4027, Philippines.

Author's contribution

The sole author designed, analyzed, interpreted and prepared the manuscript.

Article Information

DOI: 10.9734/JERR/2022/v23i12766

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/93932>

Original Research Article

Received: 18/09/2022

Accepted: 21/11/2022

Published: 24/11/2022

ABSTRACT

Wire Bonding process uses precious materials such as gold, silver, and copper wires to create a connection from the die to the strip and completing the circuitry of a semiconductor unit. Wire consumption is identified by length that is consumed per unit and higher consumption leads to inflated cost of the product. Upon unit processing, the standard wire consumption per unit is 0.036 meters equivalent to 27800 units per 1000 meters spool but only produced 26900 units. The study focuses on validation of the possible cause of lacking 800 units equivalent to 32 meters of wire length. Using the gold wire density, volume, and weight of the wire, wire length is formulated that can be used for hand calculation and verification of actual wire length. Methodology used for validation resulted that the actual unit consumption for wire length is at 0.037 meters which lacks 0.001 meter per unit, and this is equivalent to approximately 800 units per 1000-meter spool. In parallel, supply is compliant with the 1000 meters of wire per spool. Through the results collected, it was concluded that the standard is not sufficient to be the reference for the actual wire consumption resulting to the impression of high wire consumption. It was recommended for the alignment of the standards with the actual validation using the methodology stated on the study and hand calculation using wire length formula.

*Corresponding author: Email: mariane.mendoza@st.com;

Keywords: Wire length; wire; density; weight; cylinder volume; wire usage.

1. INTRODUCTION

Wire Bonding is the process of connecting the die to the strip leads which establish connection from die function to the board upon board mounting. Fig. 1 shows the wire and how it connects the die and the leads of the strip.

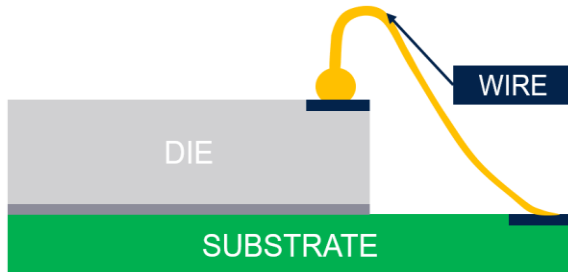


Fig. 1. Wire Bonding Connection

Wires used for wire bonding process varies with different material with different diameters, depending on the application and design of the devices being made. Different wire materials including gold, silver, and copper have different material properties including density and weight. On Table 1, densities of materials are different with precious materials used on wire bonding.

Table 1. Density of Precious Metals used for Wire Bonding

Density	Precious Metals (g/cm^3)
Gold	19.32
Silver	10.49
Copper	8.96

Aside from the technical properties of the wires, wire length per spool is identified to be critical on the business side. With the length of wire, numbers of units can be calculated which is considered for unit cost of the product. Actual wire usage and the verification of the wire spool length from supplier was not verified upon usage, instead there is a calculated standards that came from the design of the unit.

During the processing of units with 40 gold wires, cost spent on the wire is high compared to the output expected from the standards. The standard resulted to have 0.036 meters (m) of wire per unit which will produce at least 27.8K (thousands) units per 1000-meters spool. However, total units produced per wire spool is only 26.9K units at average which lacks approximately 900 units that is equivalent to 32 meters of wire per spool.

The study is pushed through to verify the cause of high consumption of wires at manufacturing. In this study, the author will validate if the wire length from the supplier is compliant with the commitment of 1000 meters per spool focusing on the properties of gold wire which are density, volume, and weight. The wire overconsumption at manufacturing will be assessed also on the succeeding pages of the study, and the accuracy of the declared standards will be challenged to arrive on the true cause of wire high consumption.

2. METHODOLOGY

There is no hand calculation to validate the length of the gold wire used on the manufacturing area. Incoming quality checking refers only with the compliance of the supplier with the submitted certificates along with the wires. Through the gold's density in grams per cubic meter (g/m^3), wire diameter in meters (m), and actual weight of the spool in grams (g), wire length can be formulated and derived and used for hand calculation method.

To validate the wire length considering the needed information from the formula, the first step was to get the actual weight of wires together with the spool. The next step is to install the weighed wire and spool on the machine as wires were delivered on the manufacturing line in a spool and ready to be installed.

Actual wire usage from the weighted spool is monitored and controlled from installation until spool was emptied. Stray wire bin was free from any wires prior weighted spool installation so all the wires to be collected are only coming from the same spool. Machine unit records were reset prior using the spool and all units processed were recorded as part of the actual validation.

Once the spool is emptied, the spool and collected stray wires were weighted separately. Weight of the spool will be deducted from the initial wire and spool weight to get the wire weight only. Stray wires will be added on the result of the wire only weight as it is part of the wire spool.

Using the formula, wire length will be calculated using the wire actual weight, the smallest measured wire diameter from supplier certificate, and the gold density. Result of wire length will be

compared with the supplier's declaration of wire length on their certificate. The result of the calculated length will be divided with the standard for result of ideal units produced. On the other hand, the actual number of units recorded from the spool will also be divided on wire length to verify the actual wire consumption. The results between the standard and the actual consumptions will be compared.

Once all the validations were done, the source of high wire consumption will be known together with the recommended actions for the solution.

3. RESULTS AND DISCUSSION

3.1 Wire Length Formulation and Derivation

Gold has the density of 19.3 g/cm^3 . thus it was the same density with the wires that are used for bonding of units. Wire is typically a long cylinder which has a radius, volume, and length. Weight of the wire with the spool can be measured through the weighing scale. With the given wire properties, wire length formula can be derived by using the volume, density, and weight of the wire.

Equation (Eq.) 1 shows the density formula for gold, where density is equivalent to mass over the volume of the wire. Mass is the weight under grams (g) and volume is on cubic meters (m^3).

$$\rho = \frac{m}{V} \tag{1}$$

Where:

ρ is the symbol for Gold Density.

m is the mass of the wire.

V is the cylindrical volume of the wire.

Mass is the actual weight of the wire from the weighing scale and display is already in grams. Volume to be used is the volume of the cylinder which was shown on Eq. 2.

$$V = \pi r^2 l \tag{2}$$

Where:

V is the volume of the cylinder (wire shape).

π is the pi value.

r is the radius of the wire.

l is the length of the wire.

Considering the formulas with regards to the wire properties, the resulting formula for density is shown on Eq. 3.

$$\rho = \frac{m}{\pi r^2 l} \tag{3}$$

Where:

ρ is the symbol for Gold Density.

m is the mass of the wire.

π is the pi value.

r is the radius of the wire.

l is the length of the wire.

Eq. 4 shows the derivation of Length from the formula shown on Eq. 3. Length is equal to the mass divided by the area of circle multiplied by the density.

$$l = \frac{m}{\pi r^2 \rho} \tag{4}$$

Where:

ρ is the symbol for Gold Density.

m is the mass of the wire.

π is the pi value.

r is the radius of the wire.

l is the length of the wire.

With the data on hand available to supply and substitute values into the formula, wire length can be validated and computed through hand calculation.

3.2 Compliance of Wire Length on the Spool

Using the wire length formula on Eq. 4, the length of the spool can be validated through the hand calculation. On this study, the wire under validation has a diameter of 15 micrometers with the wire length of 1000 meters per spool.

Actual weight of the wire is 3.23 grams. Length needed is in meters, thus gold density to be use is $19\,300\,000 \text{ g/m}^3$. Actual diameter of the wire is 14.6 micrometers. Actual measurements resulted to the length of 999.38 meters which is close to the 1000 meters commitment by the supplier.

$$l = \frac{m}{\pi r^2 \rho}$$

Length = 999.38 meters

$$\text{Length} = \frac{3.23g}{\pi(0.0000073m)^2 (19300000g/m^3)}$$

Fig. 2. Sample computation for 15um wire

Through the hand calculation of wire length from actual data gathered for weight and radius, the result of the validation shows that the supply of wire per spool is acceptable and passing the specification. No observed lack of wire length from the raw material of gold wire.

Table 2. Wire length validation on 10 spools of wire

Spool	Spool1	Spool2	Spool3	Spool4	Spool5	Spool6	Spool7	Spool8	Spool9	Spool10
Meters (m) per unit	0.037	0.037	0.037	0.037	0.037	0.038	0.036	0.037	0.037	0.037
Average (m)					0.037					
Maximum (m)					0.038					
Minimum (m)					0.036					

3.3 Meters per Unit Consumption

Unit produced on the machine was closely monitored during the data gathering where the total number of units produced for 1000-meter spool is at 26.9K units only instead of the expected 27.8K units. Since it was validated that the spool is compliant with the 1000 meters length, it was divided into the actual units produced. Shown on Fig. 3 is the computation of the wire consumption per unit.

$$\text{Meters per Unit} = \frac{\text{Calculated Length}}{\text{Actual Unit Processed}} = \frac{999.38 \text{ m}}{26899 \text{ units}}$$

$$\text{Meters per Unit} = 0.037 \text{ m/unit}$$

Fig. 3. Actual wire consumption per unit

Using the results of validation, it was found out that 0.037 meters of wire length were consumed per unit. Comparing with the standard of 0.036 meters per unit, the standard lack of 0.001 meters per unit than the actual which is equivalent to 32 meters per spool. These 32 meters of wire length is equivalent to process at least 800 units more. The 32 meters of wire length per spool is the source of the overspending at wire as the standard and the actual consumption is not aligned.

Further replications for 10 spools of wire were done using the same formula of wire length. Shown on Table 2 that per spool data is close with each other which garnered the average of 0.037 meters per spool of wire.

According to the results of validations, the standard wire length has been challenged to be aligned with the actual wire consumption using the stated methodology. The formula for wire length derived on the density, volume, and weight of gold was found to be valid.

4. CONCLUSION AND RECOMMENDATIONS

Given with the data and results of the wire length validation, it is concluded that based on the actual wire consumption, the reference standard

is insufficient by 0.001 meters per unit which is equivalent to on about 800 units per spool of wire. Result of the validation shows that the machine consumes 0.001 meters of wire more than the declared reference standard meter per unit. The difference induces the lack of units from the standard expected unit calculation which leads to conclude the source of high wire consumption impression.

Certificate of wire is compliant with the actual calculations that has approximately 1000 meters per spool using the lowest diameter referred to the certificate. As per the results of evaluation upon reference to the supplier's certificate, it is concluded that the standard consumption of wire is insufficient with the actual wire usage per unit.

Regarding the conclusion, it is recommended to revisit and update the reference standards to be aligned on the actual manufacturing consumption.

ACKNOWLEDGEMENT

The author would like to acknowledge her superior, who trusted her to be assigned to do the validation study together with his guidance, critical data reviews, and constructive commentaries that would make the study even more reliable. The author also acknowledges the manufacturing and incoming quality personnel that supported on data gathering and methodologies cited in this study. The author also acknowledged her colleagues and process experts for the consultations provided on their areas of expertise. Lastly, the author gives her highest acknowledgement to almighty God for guidance, wisdom, and strength exhausted on preparation of the study.

COMPETING INTERESTS

Author has declared that no competing interests exist.

REFERENCES

1. Tang Y, Zhang PF, Zhou B, Li GY. "Effect of gold wire configuration parameters on

- the reliability of the stacked die package." 10th International Conference on Reliability, Maintainability and Safety (ICRMS). 2014:831-835.
DOI: 10.1109/ICRMS.2014.7107317
2. Nahman A, Fan A, Chung J, Reif R. "Wire-length distribution of three-dimensional integrated circuits." Proceedings of the IEEE 1999 International Interconnect Technology Conference (Cat. No.99EX247). 1999:233-235.
DOI: 10.1109/IITC.1999.787131
 3. Krishna RR, Kumar PS, Sudharsan RR. "Optimization of wire-length and block rearrangements for a modern IC placement using evolutionary techniques." IEEE International Conference on Intelligent Techniques in Control, Optimization and Signal Processing (INCOS). 2017:1-4.
DOI: 10.1109/ITCOSP.2017.8303081
 4. Milenkovic A, Milutinovic V. "A quantitative analysis of wiring lengths in 2D and 3D VLSI implementation of 2D systolic arrays." 21st International Conference on Microelectronics. 1997;2:833-836.
DOI: 10.1109/ICMEL.1997.632973
 5. Chang FY, Tsay RS, Mak WK, Sheng-Hsiung Chen, "A separation and minimum wire length constrained maze routing algorithm under nanometer wiring rules." 18th Asia and South Pacific Design Automation Conference (ASP-DAC). 2013:175-180.
DOI: 10.1109/ASPDAC.2013.6509592
 6. Kyogoku T, Inoue J, Nakashima H, Uezono T, Okada K, Masu K. "Wire length distribution model considering core utilization for system on chip." IEEE Computer Society Annual Symposium on VLSI: New Frontiers in VLSI Design (ISVLSI'05). 2005:276-277.
DOI: 10.1109/ISVLSI.2005.76
 7. Fang LK, Seng NH, Dimitrovici P. "Wire bondability evaluation of concave bond pad." IEEE 9th International Nanoelectronics Conferences (INEC). 2019:1-4,
DOI: 10.1109/INEC.2019.8853843
 8. Cheng XL, Huang YC. "Effect of the properties of gold wire on the ability of low-looped wire bonding." 7th International Conference on Electronic Packaging Technology. 2006:1-4.
DOI: 10.1109/ICEPT.2006.359863
 9. Park AY, et al. "Low height wire bond looping technology using wedge bonding for the MMIC package." IEEE 9th Electronics System-Integration Technology Conference (ESTC). 2022:169-174.
DOI:10.1109/ESTC55720.2022.9939535
 10. Nie T, Zhu Z, Kong Q, Zhou L, Wang Z. "Machine learning framework using complex network features to predict wire-length." IEEE International Symposium on Circuits and Systems (ISCAS). 2022:3249-3254.
DOI: 10.1109/ISCAS48785.2022.9937810
 11. Li BY, Lin RB. "Scalable synthetic circuit generation using geometry embedding for CAD tool assessment." IEEE International Symposium on Circuits and Systems (ISCAS). 2022:3239-3243.
DOI:10.1109/ISCAS48785.2022.9937638
 12. Ghorui S, Banerjee S, Majumder S. "A deterministic multi-layered partitioning tool for wire-length reduction of monolithic 3D-IC," IEEE 26th International Conference on High Performance Computing, Data, and Analytics (HIPD). 2019:44-51.
DOI: 10.1109/HIPD.2019.00017.

© 2022 Mendoza; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/93932>